



## Lot 9 Compliance Guide for Unitrends Recovery MAX Appliances

Document version 2.09222020

User Guide | September 2020

[msp.unitrends.com](https://msp.unitrends.com)

**UNITRENDS** **MSP**



# Copyright

Copyright © 2020 Unitrends Incorporated. All rights reserved.

Content in this publication is copyright material and may not be copied or duplicated in any form without prior written permission from Unitrends, Inc (“Unitrends”). This information is subject to change without notice and does not represent a commitment on the part of Unitrends.

The software described in this publication is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of the license agreement. See the End User License Agreement before using the software.

The software described contains certain open source components that are copyrighted. For open source licenses, see the Unitrends Open Source Compliance section of the product Administrator Guide.

Because of the nature of this material, numerous hardware and software products are mentioned by name. In most, if not all, cases these product names are claimed as trademarks by the companies that manufacture the products. It is not our intent to claim these names or trademarks as our own.

The following applies to U.S. Government End Users: The Software and Documentation are “Commercial Items,” as that term is defined at 48 C.F.R.2.101, consisting of “Commercial Computer Software” and “Commercial Computer Software Documentation,” as such terms are used in 48 C.F.R.12.212 or 48 C.F.R.227.7202, as applicable. Consistent with 48 C.F.R.12.212 or 48 C.F.R.227.7202 1 through 227.7202 4, as applicable, the Commercial Computer Software and Commercial Computer Software Documentation are being licensed to U.S. Government end users (a) only as Commercial Items and (b) with only those rights as are granted to all other end users pursuant to the terms and conditions herein. Unpublished rights reserved under the copyright laws of the United States. Unitrends agrees to comply with all applicable equal opportunity laws including, if appropriate, the provisions of Executive Order 11246, as amended, Section 402 of the Vietnam Era Veterans Readjustment Assistance Act of 1974 (38 USC 4212), and Section 503 of the Rehabilitation Act of 1973, as amended, and the regulations at 41 CFR Parts 60 1 through 60 60, 60 250, and 60 741. The affirmative action clause and regulations contained in the preceding sentence shall be incorporated by reference.

The following applies to all contracts and subcontracts governed by the Rights in Technical Data and Computer Software Clause of the United States Department of Defense Federal Acquisition Regulations Supplement:

RESTRICTED RIGHTS LEGEND: USE, DUPLICATION OR DISCLOSURE BY THE UNITED STATES GOVERNMENT IS SUBJECT TO RESTRICTIONS AS SET FORTH IN SUBDIVISION (C)(1)(II) OF THE RIGHTS AND TECHNICAL DATA AND COMPUTER SOFTWARE CLAUSE AT DFAR 252 227 7013. UNITRENDS CORPORATION IS THE CONTRACTOR AND IS LOCATED AT 200 WHEELER ROAD, NORTH TOWER, 2ND FLOOR, BURLINGTON, MASSACHUSETTS 01803.

Unitrends, Inc  
200 Wheeler Road  
North Tower, 2nd Floor  
Burlington, MA 01803, USA  
Phone: 1.866.359.5411

# Contents

---

<b>Chapter 1: Lot 9 Compliance Guide for Unitrends Recovery Max Appliances</b> .....	4
Product description .....	4
Lot 9 requirements and results .....	4
80 PLUS ratings .....	5
Operating condition classes .....	6
80 PLUS Verification Testing Report .....	8



# Chapter 1: Lot 9 Compliance Guide for Unitrends Recovery Max Appliances

This document describes Unitrends Recovery Series appliance requirements and results for Lot 9 compliance. See these topics for details:

- "Product description"
- "Lot 9 requirements and results"

## Product description

The following table provides product type, manufacturer name, registered trade name and address, and model numbers of the Unitrends Recovery MAX appliances that require Lot 9 compliance:

Item	Description
Product type	Data storage
Manufacturer's name	Unitrends
Registered trade name	Unitrends
Registered trade address	200 Summit Drive, Suite 200 Burlington, MA 01803
Product model numbers	MAX2-32, MAX2-64, MAX4-32, MAX4-64, MAX8-32, MAX8-64 UMSP2-32, UMSP2-64, UMSP4-32, UMSP4-64, UMSP8-32, UMSP8-64
Year of manufacture	2019

## Lot 9 requirements and results

Lot 9 requirements are described in the following table. See the applicable section referenced in the Result column for detailed results and remarks.

Lot 9 Requirement	Description	Result
PSU efficiency	PSU efficiency at 10% (if applicable), 20%, 50% and 100% of rated output power, with the exception of direct current online data storage products, expressed in % and rounded to the first decimal place.	For details, see " <a href="#">80 PLUS ratings</a> ".
Power factor	Power factor at 50% of the rated load level, with the exception of direct current online data storage products, rounded to three decimal places.	For details, see " <a href="#">80 PLUS Verification Testing Report</a> ".
Operating condition class	Declared operating condition class. This product has been tested in order to verify that it will function within the boundaries (such as temperature and humidity) of the declared operating condition class.	For details, see " <a href="#">Operating condition classes</a> ".
Data deletion	Instructions for secure data deletion.	To securely delete data from a Recovery Series appliance, Unitrends recommends that you re-image the appliance. For details, see this Unitrends Knowledge Base article: <a href="#">KB 360013198897</a> .

## 80 PLUS ratings

80 PLUS test type	115 V internal non-redundant				230 V internal redundant				230 V EU internal non-redundant			
	10%	20%	50%	100%	10%	20%	50%	100%	10%	20%	50%	100%
80 PLUS	n/a	80%	80%	80%	n/a	n/a	n/a	n/a	n/a	82%	85%	82%
80 PLUS Bronze	n/a	82%	85%	82%	n/a	81%	85%	81%	n/a	85%	88%	85%
80 PLUS Silver	n/a	85%	88%	85%	n/a	85%	89%	85%	n/a	87%	90%	87%
80 PLUS Gold	n/a	87%	90%	87%	n/a	88%	92%	88%	n/a	90%	92%	89%

80 PLUS test type	115 V internal non-redundant				230 V internal redundant				230 V EU internal non-redundant			
	Percentage of rated load	10%	20%	50%	100%	10%	20%	50%	100%	10%	20%	50%
80 PLUS Platinum	n/a	90%	92%	89%	n/a	90%	94%	91%	n/a	92%	94%	90%
80 PLUS Titanium	90%	92%	94%	90%	90%	94%	96%	91%	90%	94%	96%	94%

## Operating condition classes

Operating condition class	Dry bulb temp range	Humidity range, non-condensing	Max dew point (°C)	Max rate of change (°C/hr)
A1	<ul style="list-style-type: none"> <li>Allowable: 5 – 32</li> <li>Recommended: 18 – 27</li> </ul>	<ul style="list-style-type: none"> <li>Allowable: –12 °C Dew Point (DP) and 8% relative humidity (RH) to 17 °C DP and 80% RH</li> <li>Recommended: –9 °C DP to 15 °C DP and 60% RH</li> </ul>	17	5/20
A2	<ul style="list-style-type: none"> <li>Allowable: 10 – 35</li> <li>Recommended: 18 – 27</li> </ul>	<ul style="list-style-type: none"> <li>Allowable: –12 °C DP and 8% RH to 21 °C DP and 80% RH</li> <li>Recommended: –9 °C DP to 15 °C DP and 60% RH</li> </ul>	21	5/20
A3	<ul style="list-style-type: none"> <li>Allowable: 5 – 40</li> <li>Recommended: 18 – 27</li> </ul>	<ul style="list-style-type: none"> <li>Allowable: –12 °C DP and 8 % RH to 24 °C DP and 85% RH</li> <li>Recommended: –9 °C DP to 15 °C DP and 60% RH</li> </ul>	24	5/20

Operating condition class	Dry bulb temp range	Humidity range, non-condensing	Max dew point (°C)	Max rate of change (°C/hr)
A4	<ul style="list-style-type: none"><li>Allowable: 5 – 45</li><li>Recommended: 18 – 27</li></ul>	<ul style="list-style-type: none"><li>Recommended : -9 °C DP to 15 °C DP and 60% RH</li></ul>	24	5/20


# 80 PLUS Verification Testing Report

## 80 PLUS Verification and Testing Report

<b>TYPICAL EFFICIENCY (50% Load):</b>	<b>92.51%</b>
<b>AVERAGE EFFICIENCY :</b>	<b>91.23%</b>
<b>80 PLUS COMPLIANT:</b>	<b>YES</b>



<b>Ecos ID#</b>	4445.1
<b>Manufacturer</b>	Super Micro Computer, Inc.
<b>Model Number</b>	PWS-350-1H
<b>Serial Number</b>	N/A
<b>Year</b>	2015
<b>Type</b>	1U
<b>Test Date</b>	9/15/15


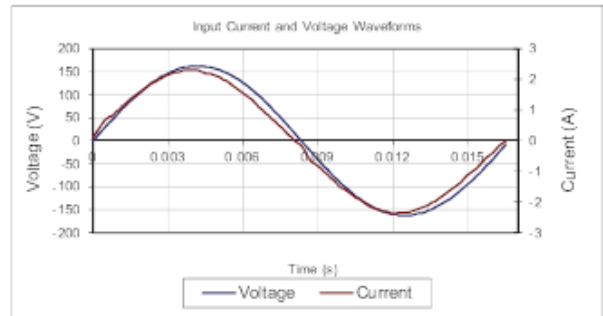


Input AC Current Waveform (ITHD = 1.89%, 50% Load)

Rated Specifications	Value	Units
Input Voltage	100-240	Volts
Input Current	5-2.5	Amps
Input Frequency	50-60	Hz
<b>Rated Output Power</b>	<b>350</b>	<b>Watts</b>

Note: All measurements were taken with input voltage at 115 V nominal at 60 Hz

I <sub>RMSA</sub> A	PF	I <sub>THD</sub> (%)	Load (%)	Input Watts	DC Terminal Voltage (V)/ DC Load Current (A)					Output Watts	Efficiency %
					12V (cumulative of 12V1, 12V2, etc.)						
0.40	0.90	11.34%	10%	41.39	12.14/2.28	-12.06/0.02	3.34/0.66	5.15/0.82	5.14/0.24	35.64	86.10%
0.70	0.97	6.97%	20%	77.90	12.09/4.57	11.75/0.03	3.34/1.32	5.14/1.65	5.13/0.47	70.89	91.00%
1.67	0.99	1.89%	50%	191.23	12.07/11.44	11.32/0.08	3.33/3.29	5.13/4.08	5.11/1.18	176.91	92.51%
3.41	1.00	1.16%	100%	391.40	12.06/22.86	11.18/0.16	3.32/6.58	5.11/8.17	5.06/2.36	352.98	90.18%

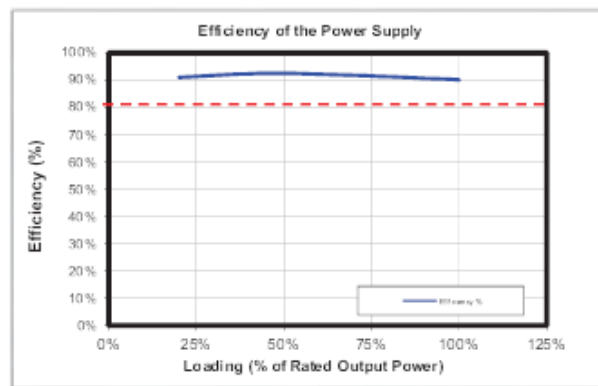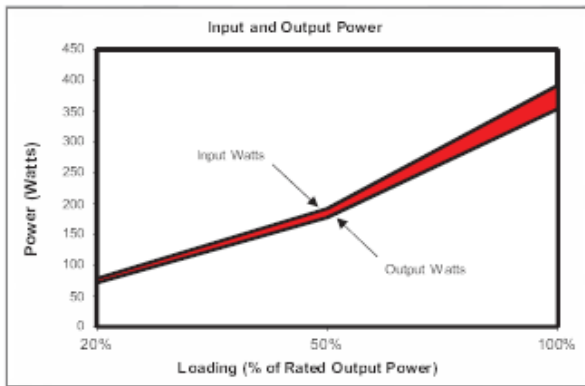

These tests were conducted by a third party independent testing firm on behalf of the 80 PLUS Program. 80 PLUS is a certification program to promote highly-efficient power supplies (greater than 80% efficiency in the active mode) in technology applications. <http://www.80plus.org/>

